


Double Balance Mixers

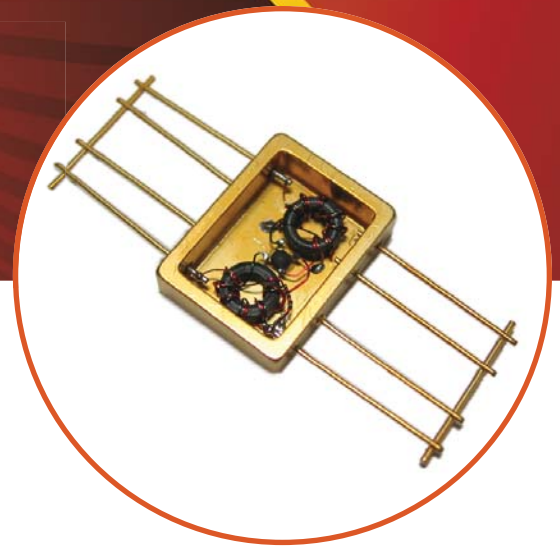

Model Number	RF/LO Frequency (MHz)	IF Frequency MHz	Conversion Loss (dB)	Isolation		
				L-R	L-I	R-I
MX-250	1-500	DC-500 MHz	8	35	20	20
MX-500	5-1000	DC-1000 MHz	8.5	25	15	15
MX-800	100-1500	DC-1000 MHz	9.5	20	14	10
MX-1250	500-2000	DC-1000 MHz	8	25	20	20
MX-1750	1000-2500	DC-1000 MHz	9.5	20	15	15
MX-2000	1000-3000	DC-1000 MHz	9.5	20	17	17
MX-3250	2000-4500	DC-1200 MHz	8.5	30	17	17
MX-4150	3000-5300	DC-1200 MHz	9.5	28	12	12
MX-4250	2.5-6 GHz	DC-2.5 GHz	7	30	25	15
MX-5000	2-8 GHz	DC-2 GHz	8	30	15	15
MX-8000	4-12 GHz	DC-2 GHz	8	20	15	15
MX-12000	6-18 GHz	1-6 GHz	9	15	18	15
MX-10000	2-18	DC-3 GHz	8.5	20	18	15