


# 8 Way Power Divider

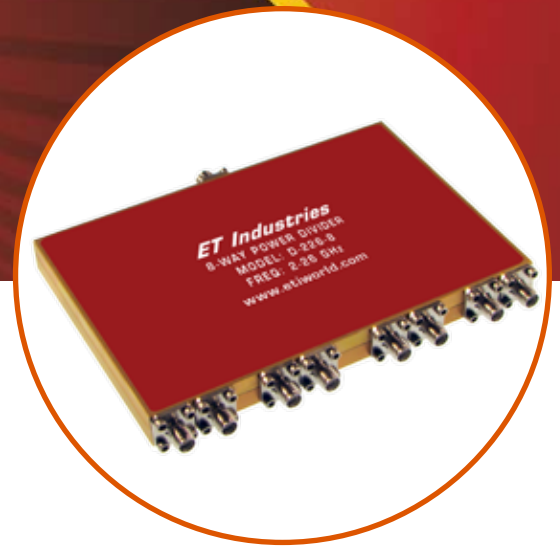

Model Number	Frequency Range (GHz)	Input VSWR Max	Output VSWR Max	Insertion Loss Max (dB)	Isolation Min (dB)	Amplitude Balance Max (dB)	Phase Balance Max (Deg.)
D-058-8	0.5-8.0	1.50:1	1.50:1	6.00	16.0	0.50	5.0
D-0518-8	0.5-18.0	1.55:1	1.55:1	7.00	15.0	0.70	6.0
D-0526-8	0.5-26.5	1.60:1	1.60:1	8.00	14.0	0.80	9.0
D-118-8	1.0-18.0	1.70:1	1.70:1	5.50	17.0	0.60	6.0
D-126-8	1.0-26.5	1.75:1	1.75:1	6.00	16.0	0.60	7.0
D-140-8	1.0-40.0	1.80:1	1.80:1	7.00	15.0	0.90	8.0
D-150-8	1.0-50.0	1.85:1	1.85:1	8.00	14.0	0.90	9.0
D-218-8	2.0-18.0	1.60:1	1.60:1	4.00	16.0	0.60	6.0
D-226-8	2.0-26.5	1.75:1	1.75:1	4.50	15.0	0.70	7.0
D-240-8	2.0-40.0	1.80:1	1.80:1	5.50	14.0	0.80	9.0
D-250-8	2.0-50.0	1.85:1	1.85:1	6.00	13.0	0.90	9.0
D-618-8	6.0-18.0	1.65:1	1.65:1	3.00	16.0	0.60	6.0
D-626-8	6.0-26.5	1.65:1	1.65:1	3.40	15.0	0.80	6.0
D-640-8	6.0-40.0	1.75:1	1.75:1	3.60	13.0	0.90	8.0
D-1026-8	10.0-26.5	1.65:1	1.65:1	3.40	15.0	0.80	6.0
D-1040-8	10.0-40.0	1.75:1	1.75:1	3.60	14.0	0.90	8.0
D-1826-8	18.0-26.5	1.65:1	1.65:1	3.40	18.0	0.60	6.0
D-1840-8	18.0-40.0	1.70:1	1.70:1	3.60	17.0	0.80	7.0

For customized frequency range and specifications, please contact a sales representative at [sales@etiworld.com](mailto:sales@etiworld.com).