



4 Way Power Divider

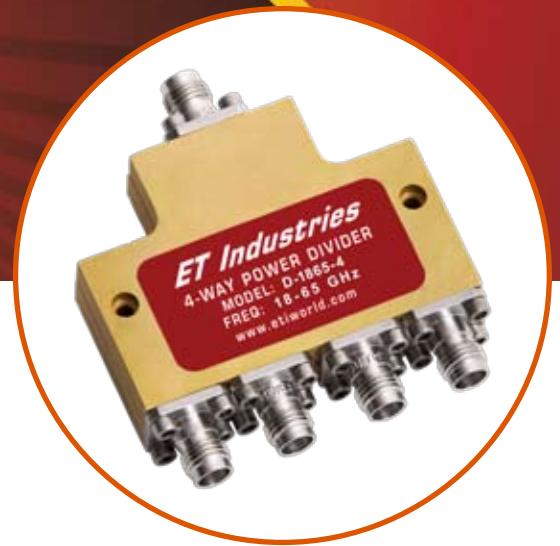

Model Number	Frequency Range (GHz)	Input VSWR Max	Output VSWR Max	Insertion Loss Max (dB)	Isolation Min (dB)	Amplitude Balance Max (dB)	Phase Balance Max (Deg.)
D-0318-4	0.3-18.0	1.40:1	1.40:1	8.50	20.0	0.40	4.00
D-0326-4	0.3-26.5	1.40:1	1.40:1	11.90	20.0	0.50	6.00
D-048-4	0.4-2.0	1.80:1	1.55:1	0.90	15.0	0.20	2.00
	2.0-8.0	1.55:1	1.55:1	2.00	19.0	0.40	4.00
D-0418-4	0.4-2.0	1.80:1	1.60:1	0.90	15.0	0.20	2.00
	2.0-18.0	1.60:1	1.60:1	3.80	19.0	0.50	6.00
D-0426-4	0.4-2.0	1.80:1	1.65:1	0.90	15.0	0.20	2.00
	2.0-26.5	1.65:1	1.65:1	5.20	18.0	0.50	7.00
D-058-4	0.5-2.0	1.40:1	1.40:1	0.90	15.0	0.20	2.00
	2.0-8.0	1.55:1	1.55:1	2.00	19.0	0.40	4.00
D-0518-4	0.5-2.0	1.40:1	1.40:1	0.90	15.0	0.20	2.00
	2.0-18.0	1.60:1	1.60:1	3.80	19.0	0.50	5.00
D-0526-4	0.5-2.0	1.40:1	1.40:1	0.90	15.0	0.20	2.00
	2.0-26.5	1.65:1	1.65:1	5.20	18.0	0.50	6.00
D-0540-4	0.5-2.0	1.75:1	1.75:1	0.90	15.0	0.20	2.00
	2.0-40.0	1.75:1	1.75:1	7.50	17.0	0.60	7.00
D-118-4	1.0-18.0	1.50:1	1.50:1	2.50	17.0	0.50	6.00
D-126-4	1.0-26.5	1.60:1	1.60:1	3.00	17.0	0.60	8.00
D-140-4	1.0-40.0	1.70:1	1.70:1	5.40	16.0	0.80	9.00
D-150-4	1.0-50.0	1.75:1	1.75:1	6.40	15.0	0.80	9.00
D-218-4S	2.0-18.0	1.45:1	1.45:1	1.80	17.0	0.60	6.00
D-218-4	2.0-18.0	1.45:1	1.45:1	2.40	17.0	0.50	6.00
D-226-4	2.0-26.5	1.55:1	1.55:1	2.70	17.0	0.60	7.00
D-240-4	2.0-40.0	1.65:1	1.65:1	4.50	16.0	0.80	9.00
D-250-4	2.0-50.0	1.75:1	1.75:1	5.30	15.0	0.90	9.00

4 Way Power Divider

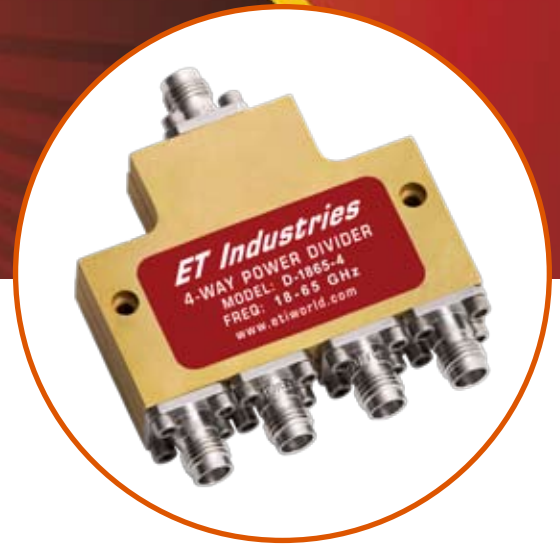

Model Number	Frequency Range (GHz)	Input VSWR Max	Output VSWR Max	Insertion Loss Max (dB)	Isolation Min (dB)	Amplitude Balance Max (dB)	Phase Balance Max (Deg.)
D-618-4	6.0-18.0	1.50:1	1.50:1	1.30	19.0	0.60	5.00
D-626-4	6.0-26.5	1.60:1	1.60:1	1.90	16.0	0.60	6.00
D-640-4	6.0-40.0	1.65:1	1.65:1	2.50	16.0	0.70	8.00
D-1026-4	10-26.5	1.60:1	1.60:1	1.90	18.0	0.50	6.00
D-1040-4	10.0-40.0	1.65:1	1.65:1	2.50	18.0	0.70	8.00
D-1050-4	10.0-50.0	1.75:1	1.75:1	3.20	14.0	0.80	9.00
D-1826-4	18.0-26.5	1.60:1	1.60:1	1.90	19.0	0.60	6.00
D-1840-4	18.0-40.0	1.65:1	1.65:1	2.40	18.0	0.70	7.00
D-1850-4	18.0-50.0	1.75:1	1.75:1	3.20	14.0	0.80	9.00

*For customized frequency range and specifications, please contact a sales representative at sales@etiworld.com